




★ XB-D66T



Product Feature

- Support various barcodes such as WeChat and Alipay
- New decoding chip for interpreting various 1D and 2D barcodes
- Support Chinese direct transmission of QR code
- The USB base is plug-and-play, click the button on the base to pair
- Wire life more durable

Product Size

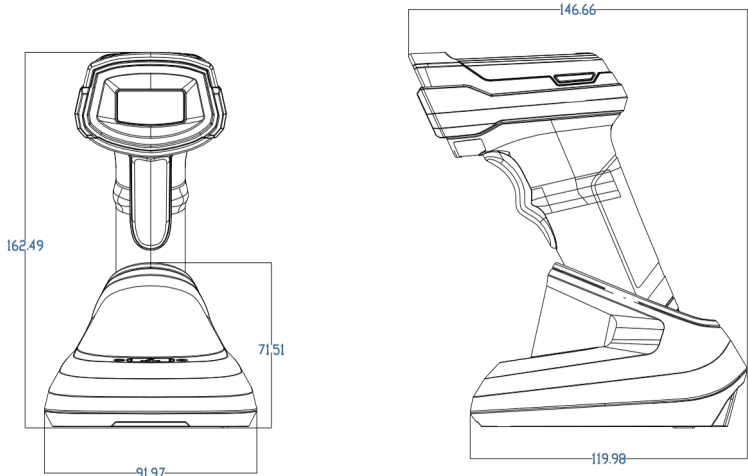

Specification

Performance Parameters	
Light Sources:	(Aimer)RED color LED, (Illumination)White color LED
Supported Symbologies:	1D: Codabar, Code39, Code32Pharmaceutical (PARAF), Interleaved 2 of 5, NEC 2 of 5, Code 93, Matrix 2 of 5, Straight 2 of 5 Industrial, EAN/JAN-8, Straight 2 of 5 IATA, Code 11, Code128, GS1-128, UPC-A, UPC-E, EAN/JAN-13, MSI, GS1 DataBar Omnidirectional, GS1 DataBarLimited, GS1 DataBar Expanded, China Post(Hong Kong 2 of 5), Korea Post. 2D: Codeblock A, Codeblock F, PDF417, Micro PDF417, MaxiCode, GS1 Composite Codes, QR Code, Data Matrix, Aztec, HANXIN.
Scanning Principle:	Image CMOS
Resolution:	640*480
Print Contrast:	20%
Scan Angle:	Yaw±65°, Rotation 360°, Pitch±65°
Depth of scan field:	Code39(5mil): 7-16cm, Code39(13mil): 7-32cm QR code (15mil): 3-18cm, Code128(20mil): 6-35cm
Error Rate:	1/5million
Interface:	USB-HID, USB-COM
Transmission distance:	100M(Open Yard)
Communication mode:	Pairing dedicated base: 2.4G Paired mobile Bluetooth devices: Dual-mode Bluetooth
Storage mode:	Offline storage mode: When the scanner leaves the connection range, the data is automatically stored. Storage capacity is 200K characters Inventory storage mode: The scanner can enter inventory mode, with a storage capacity of 200K characters
Pairing Mode:	One to One: One Scanner Pairs One base, One scanner paired with a Bluetooth mobile device.
Receiving end:	Dedicated Bluetooth U disk receiver, Android/IOS mobile device

Environmental Parameters	Physical Parameters
Operating Temperature: -20°C~50°C	Dimensions: 83.5mm*65.7mm*174.8mm
Storage Temperature: -40°C~70°C	Material: ABS+PC
Ambient lighting: 0~100000LUX	Cable Length: 1.5M
Relative Humidity: 5% ~95% RH(Non-condensing)	
Shock Resistance: Withstands multiple times 1.5 meters drops to concrete	

Electrical Parameters	
Voltage: DC5V±5%	Battery Working Time: 7h
Operating Current: Standby Current ≥35 mA. WorkingCurrent ≥300mA	
Standby Current: 0mA(Standby is to cut off battery power)	Lithium battery: 2200mAh
Charging Time: 3h	Charging Mode: Typce charging cable, plug in and charge directly

Application

